



SIRCEI



SIRWAL



SIR-PIT



SIR24SC



SIR24SC+BSLC

Luminous warning devices:

Devices that when are activated emit flashes of light in order to alert people with hearing disabilities:

A. SIRWAL and SIRCEI:

- Certified EN54-23.
- Supply: 9 ÷ 60 Vdc.
- Operating temperature: -25°C a 70°C.
- High base.
- Protection IP65.
- Red color.
- Dimensions: Ø93 mm x 65 mm.
- Flash: White 1Hz (0,5 Hz selectable).
- Consumption: 10-25 mA according selection.

A1. SIRWAL:

- Wall device.
- W 2,4 - 7,5.

A2. SIRCEI:

- Ceiling device.
- C 3 - 7,5.

B. SIR-PIT:

- Supply: 9 - 60 Vdc.
- Consumption: 3 ÷ 15 mA according selection.
- Flash: 1 flash 1Hz.
2 flashes 1Hz.
Continuous 1Hz.
- Temperature: -20°C a 55°C.
- Protection: IP21C.
- Color: red.
- Red flash.

Voice alarm device:

Device that activates a voice message with sound of fire alarm. The message is selectable from its internal list.

A. SIR24SC and SIR24SC+ BSCL:

- Voltage: 18 ÷ 28 Vdc.
- Consumption: 4 ÷ 8 mA.
- Sound: 90/100 dB selectable.
- Several selectable alarm tones.
- Temperature: -10°C a 55°C.
- Protection: IP21C.
- Color: red.
- Dimensions: 106 x 106 x 91mm.

B. SIR24SC+BSLC:

Set alarm voice with bright warning based device.

- Certified EN54-23.
- W 2,4 - 7,5.
- Consumption: 18 ÷ 28 mA.
- 1 Hz (0,5 Hz selectable).



DIAGRAM FOR SIRWAL AND SIRCEI


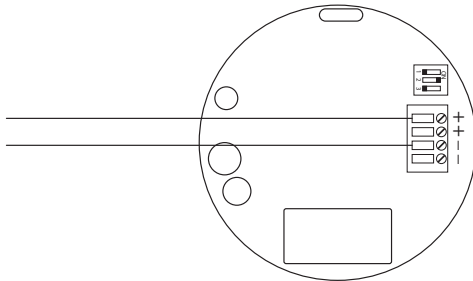


DIAGRAM FOR SIRWAL AND SIRCEI WITH BSLC AND SIRAY



NOTE: They can be connected with the SIRAYBSLC by selecting low sound and light on this device and BSLC. The calculation of consumption points of the SIRAY+BSLC and this additional device shall be computed as a SIRAY+BSLC with selection of sound and maximum light.

DIAGRAM FOR SIR24SC

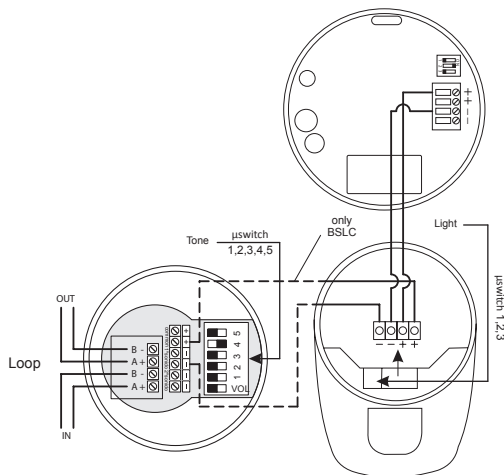