



A30XZSLDR A30XZSDDR



Addressable alarm devices


Base with EN 54-23 visual alarm certified for A30X series, EN 54-3 sound certified and base detector.

There are 2 models available:

- A30XZSLDR: A30XZ base with sound and light base, addressable.
- A30XZSDDR: A30XZ base with sound, addressable.

This device is configured in the algorithmic addressable system as a relay associated with its detector (SIRDR).

Typical uses of the A30XZSDDR and A30XZSLDR are spaces that require integrated fire detection equipment with sounder and visual alarm, such as hotel rooms fitted out for clients with hearing impairments, waiting rooms, nursing rooms, etc.

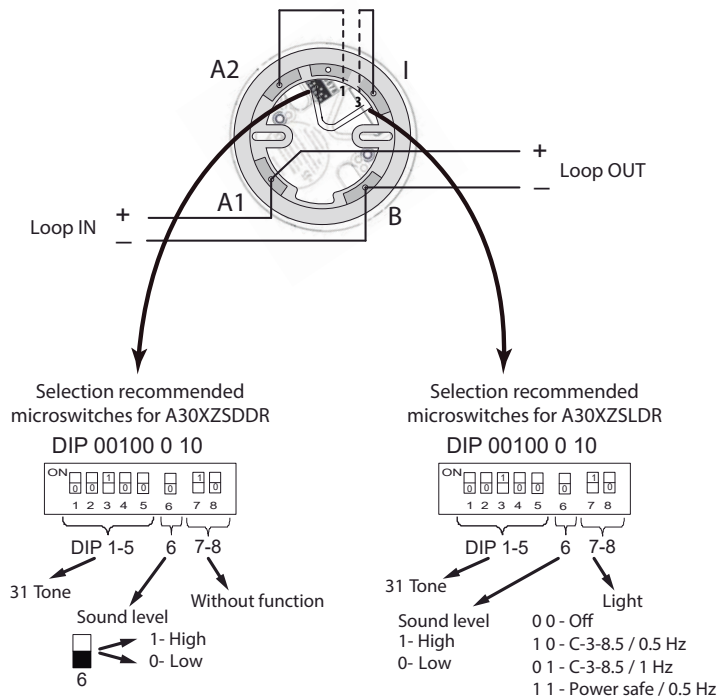

TECHNICAL FEATURES

	A30XZSDDR	A30XZSLDR
Supply	18-30 V with polarity	18-30 V with polarity
Standby consumption	0 mA	0 mA
Alarm consumption	5 mA / 6 mA (Low/High dB)	19 mA / 20 mA (Low/High dB)
Operating temperature	-10°C +55°C	-10°C +55°C
Dimensions	Ø112mm x high 43 mm (w/o detec.)	Ø112mm x high 43 mm (w/o detec.)
IP protection	IP 21C	IP 21C
Sound intensity	Low 90 / High 96 dB-1m	Low 90 / High 96 dB-1m
Tones	31 types	31 types
Standar	EN 54-3	EN 54-23 and EN 54-3
Flash	-	0,5 Hz (60 ms)