

# PUCAR

## Manual call point





Manual call point for the conventional fire detection system.

It has an indicator of action (red led) that illuminates in case of be manually operated (alarm).

Features:

- Resettable call point by pushing yellow button on the front side.
- Transparent protector cover to avoid accidental false alarms.
- Immediate visual recognition of alarm status by the permanent activation of the LED, and the trigger of
- The yellow tab on the lower side of the activation face.
- According to EN 54-11 and CE mark according the European Regulation of Construction Products (UE) N°305/2011.

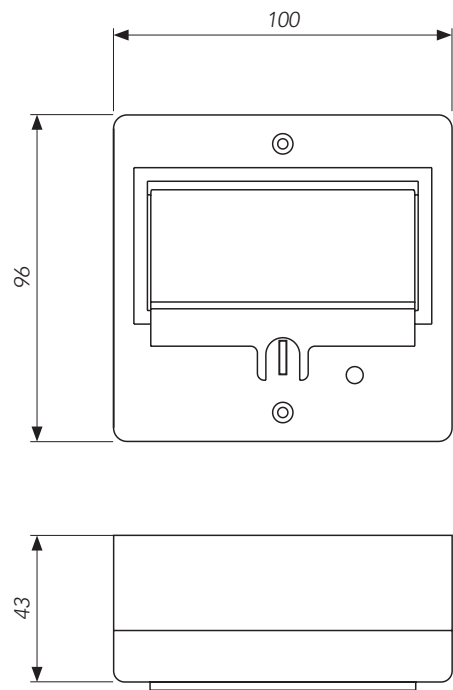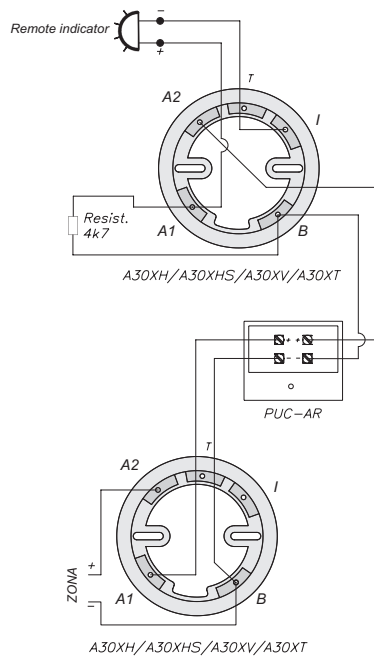

### TECHNICAL FEATURES

|                         |                        |
|-------------------------|------------------------|
| Supply                  | 24 - 35V with polarity |
| Standby consumption     | 0 mA                   |
| Alarm consumption       | 35 mA                  |
| Activation signal       | Red led                |
| Remote indicator output | No                     |
| Humidity                | 20 - 95% RH            |
| Temperature             | -10°C +50°C            |
| Standard                | EN 54-11               |
| IP protection           | IP 50                  |