


# STF / STPR

Probe temperature

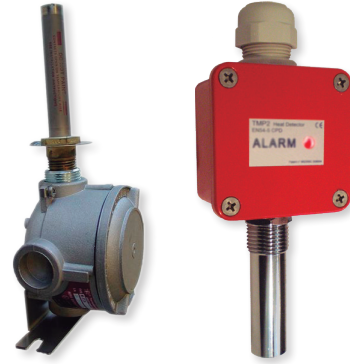


Punctual heat detector based on a probe that allows its installation in special environments.


Depending on the protection needs, the detector can be used in:

- Aggressive environments: Model IP65.
- ATEX environments: II2GD Exd IIC T6.

Protection	IP65									
Relative humidity	98%									
Weight	400g									
Bimetal component	Nilvia (Nilvar)									
Sensor material	Steel									
Fixed calibration on request (°C)	60	71	88	107	135	163	182	232	315	385

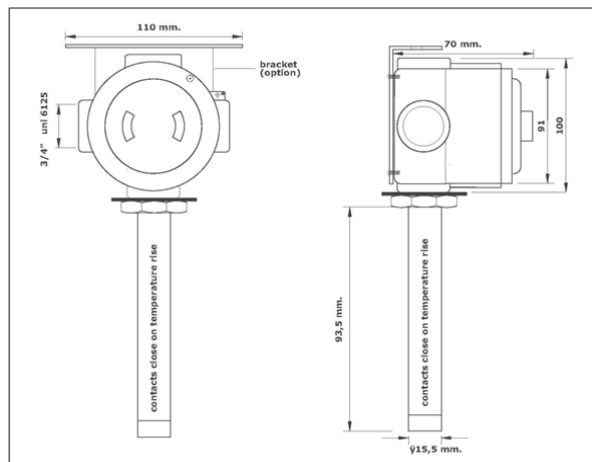

ALGORITHMIC ADDRESSABLE SYSTEM

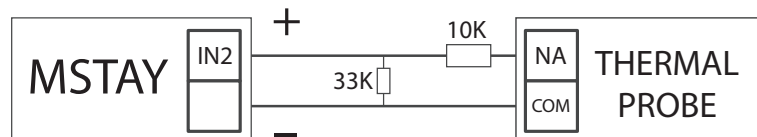

CONVENTIONAL SYSTEM

