



C50ZSL C50ZSD



Conventional alarm devices


Base for C50 conventional detectors with EN 54-23 certified visual alarm base and EN 54-3.

There are 2 models available:

- C50ZSL: D50 base with sound and light base, addressable.
- C50ZSD: D50 base with sound, addressable.

Typical uses of the C50ZSL and C50ZSD are spaces that require integrated fire detection equipment with sounder and visual alarm, such as hotel rooms fitted out for clients with hearing impairments, waiting rooms, nursing rooms, etc.

The coverage of the assembly should not exceed the coverage of the fire detector with which it is installed, unless there is a reason or use that justifies it.

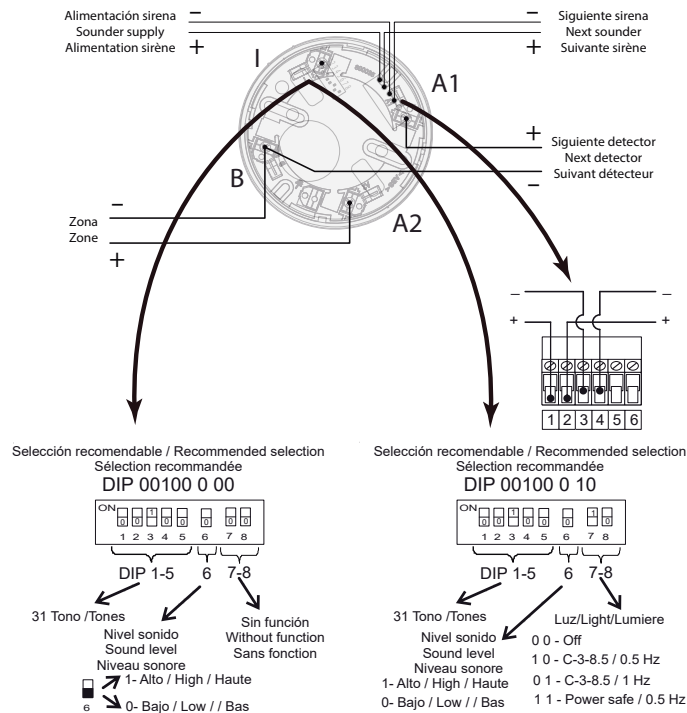

TECHNICAL FEATURES

	C50ZSD	C50ZSL
Supply	18-30 V with polarity	18-30 V with polarity
Standby consumption	0 mA	0 mA
Alarm consumption	5 mA / 6 mA (Low/High dB)	19 mA / 20 mA (Low/High dB)
Operating temperature	-10°C +55°C	-10°C +55°C
Dimensions	Ø112mm x alto 43 mm (w/o detector)	Ø112mm x alto 43 mm (w/o detector)
IP protection	IP 21C	IP 21C
Sound intensity	Low 90 / High 96 dB-1m	Low 90 / High 96 dB-1m
Tones	31 types	31 types
Standar	EN 54-3	EN 54-23 and EN 54-3
Flash	-	0,5 Hz (60 ms)