




# EXACOC

## Automatic extinguishing in kitchens

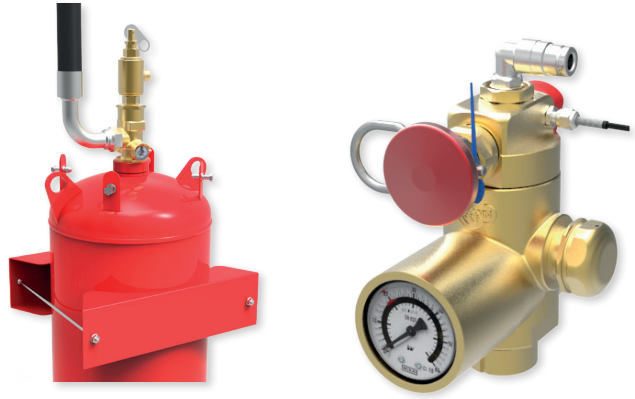

Automatic fire extinguishing system for kitchens composed of

An automatic detection system based on 9l, 12l and 25l capacity extinguishers, which provide a stainless steel pipes system on which diffusers are connected to the possible origins of the fire (stove, grill, fryer, etc.) and at least one above the filters and another in the smoke outlet 30 cm into the pipe.

|                                   | EXACOC        | EXACOC12L      | EXACOC25L      |
|-----------------------------------|---------------|----------------|----------------|
| Stainless steel cylinder          | 1 of 9 litres | 1 of 12 litres | 1 of 25 litres |
| Latiguillo inoxidable de descarga | 1             | 1              | 1              |
| Soporte pared                     | 1             | 1              | 1              |
| Válvula descarga baja presión     | 1             | 1              | 1              |
| Manómetro final de línea          | 1             | 1              | 1              |
| Tubo detector Ø6x2mm              | 10 metros     | 12 metros      | 24 metros      |
| Difusores                         | 6             | 8              | 15             |

Component features

EXAMPLE OF INSTALLATION. The following material will be required in the diagram shown:

Other gas extinguishers available:

- 1 cylinder of 9L consisting of 1 9L cylinder, valve, manometer, hose and wall bracket
  - 8m thermal tube Ø6x2mm (approx.)
  - 1 manual call point with monitoring manometer
  - 1 end-of-line pressure switch with line monitoring manometer
  - 1 diffuser for fryers
  - 3 diffusers for hot points
  - 3 diffusers for filter and pipe / plenum
- CO2
  - NOVEC
  - INERTS
  - HFC 227

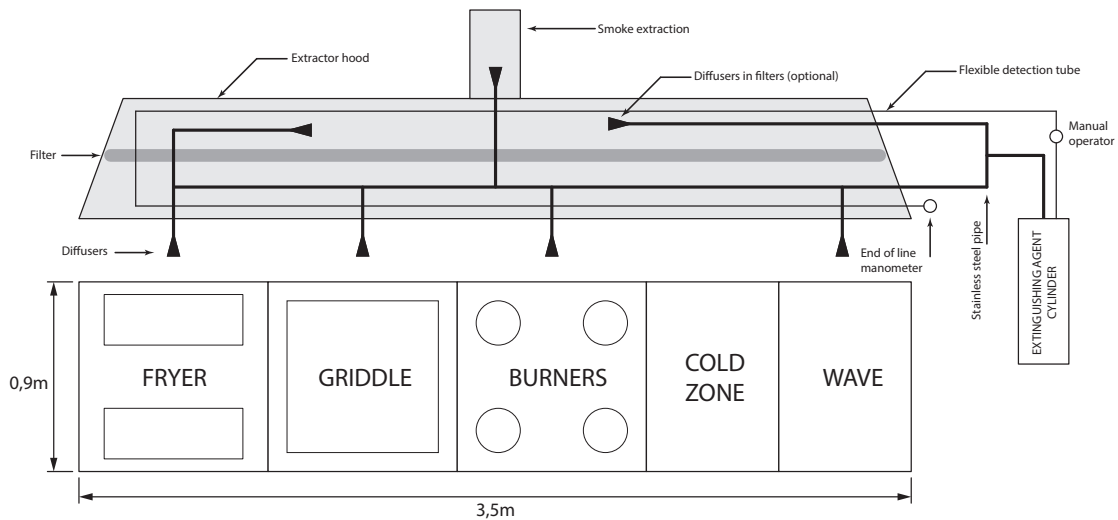


Diagram installation