

# Conventional alarm devices

## C50ZSL - C50ZSD




Base for C50 conventional detectors with EN 54-23 certified visual alarm base and EN 54-3.

There are 2 models available:

- C50ZSL: D50 base with sound and light base, addressable.
- C50ZSD: D50 base with sound, addressable.

Typical uses of the C50ZSL and C50ZSD are spaces that require integrated fire detection equipment with sounder and visual alarm, such as hotel rooms fitted out for clients with hearing impairments, waiting rooms, nursing rooms, etc.

The coverage of the assembly should not exceed the coverage of the fire detector with which it is installed, unless there is a reason or use that justifies it.

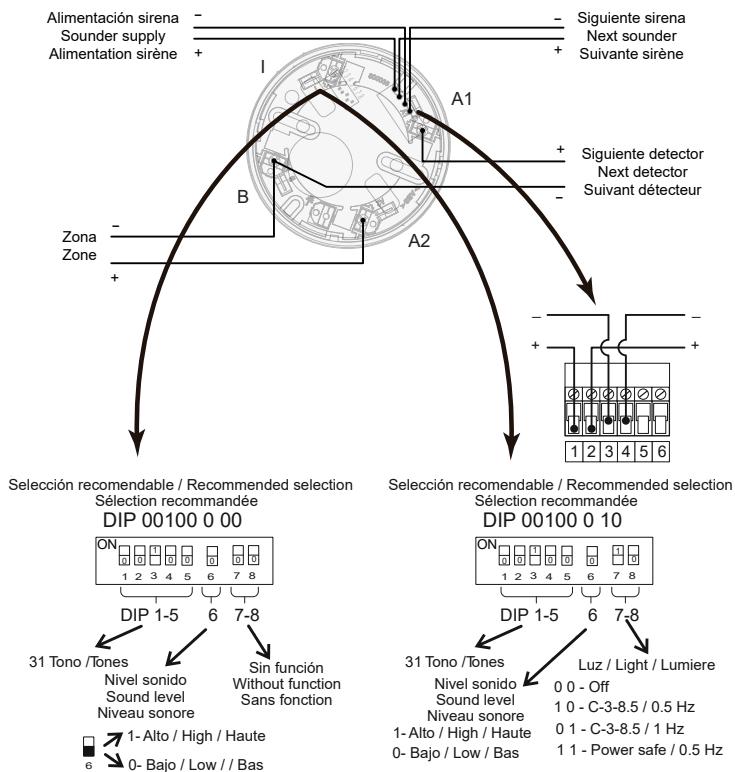

TECHNICAL FEATURES		
	C50ZSD	C50ZSL
Supply	18 - 30V with polarity	
Standby consumption	0mA	
Alarm consumption	5mA / 6mA (Low/High dB)	19mA / 20mA (Low/High dB)
Operative temperature	-10°C - +55°C	
Dimensions	Ø112x43mm (without detector)	
IP protection	IP21C	
Sound intensity	Low 90 / High 96 dB - 1m	
Tones	31 types	
Standard	EN 54-3	EN 54-23 and EN 54-3
Flash	-	0,5Hz (60ms)